




Insert the Hex Driver within the 30Ncm torque ratchet




Insert driver into abutment and turn torque ratchet clockwise until torque of 30 Ncm is reached and the head of the ratchet releases







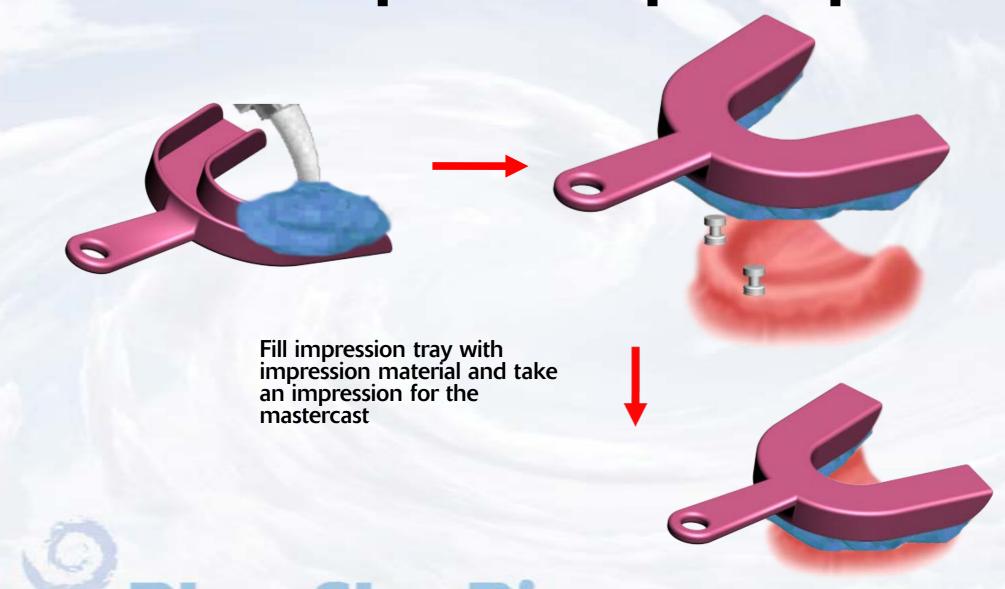





After impression material has set remove impression from mouth picking up the impression transfers

Snap analogs into the impression transfers



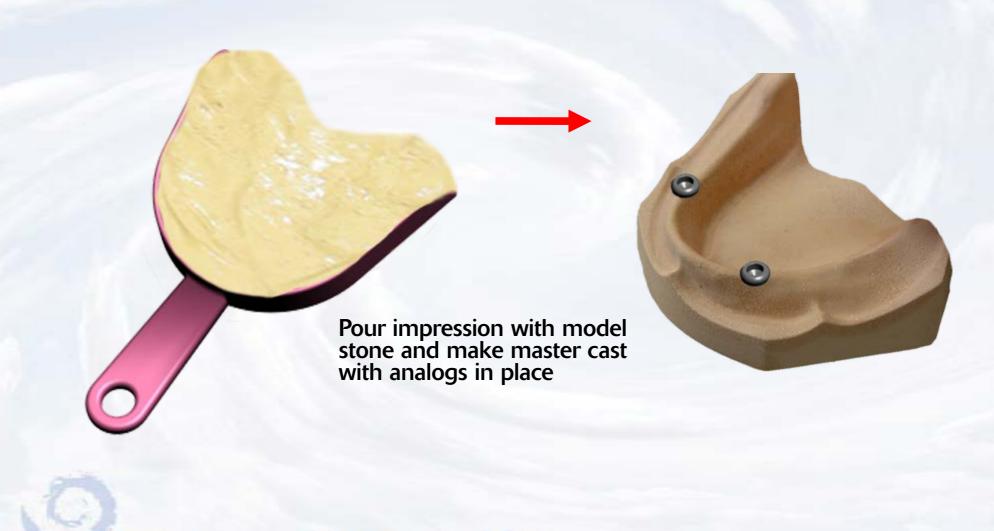



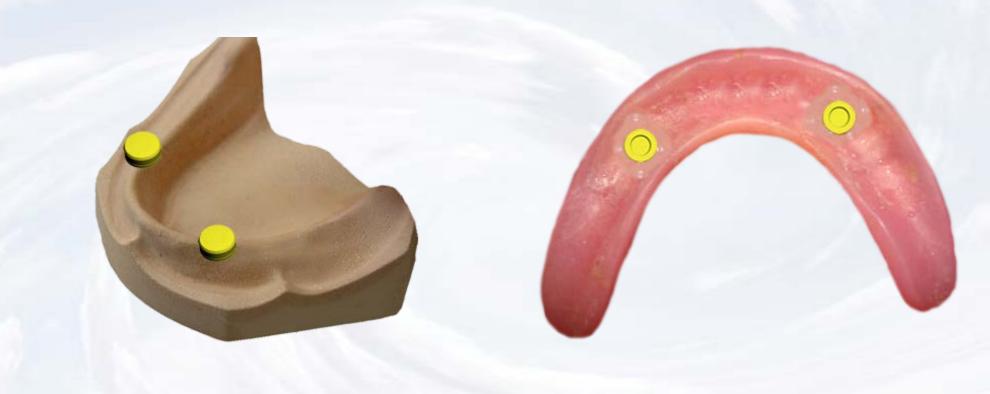

Process the denture





Remove the insert you want to change with the sharp point of the removal instrument

Place the insert with the desired retention into the denture with the opposite side of the removal instrument

